

WWW.BGCOATINGS.COM.AU



COLOUR GUIDE





## QUALITY THAT ENDURES

### Paint Epoxy Systems, Colour Guide. Developed in Australia for Australian Swimming Pools.

**BG Pool Paint Epoxy Systems** offers the ultimate coating solution in pool paint systems. We use only the finest available raw materials to create a state-of-the-art coatings system that delivers a hard-wearing diamond finish for your pool. Our smart micro-technology paint offers improved stain, chemical and abrasion resistance.

BG Pool Paint Epoxy Systems can be applied over old and new surfaces such as concrete, fiberglass and marble sheen.













With more than 50 years' combined experience in the coatings industry, BG Pools utilises European technology to offer an array of vibrant colours to renew your old pool surface or to coat your new pool with a finish that is smooth and seamless.

### Advantages of BG Pool High Solid Epoxy Pool Paint System:

- ✓ Step by step guide for the application so anybody can use it!
- ✓ Provides stain, chemical and abrasion resistance.
- ✓ Will resist algae growth.
- ✓ Durable, bright, long-lasting colour finish.
- ✓ Provides a longer service life due to increased film thickness.
- ✓ Developed with the finest raw materials.
- ✓ Can be used on ponds as well as other aquatic facilities.
- ✓ Non-toxic to marine life after full cure.
- ✓ Order up to 3 original hand-painted Master Samples.
- ✓ Developed in Australia for the Australian climate.
- ✓ Local Technical support centre available @ 1300-894-994

**FREE**  
**MASTER SAMPLES**  
**100% colour check.**



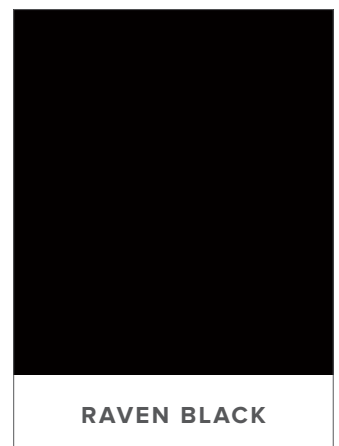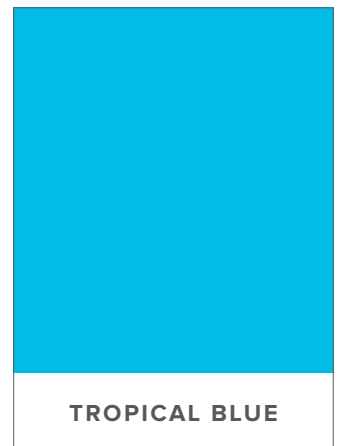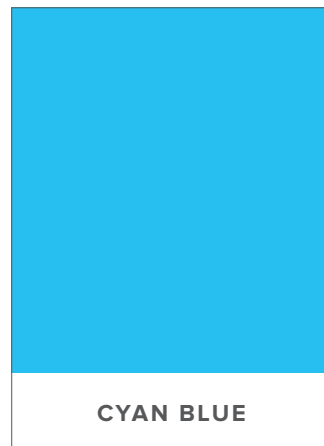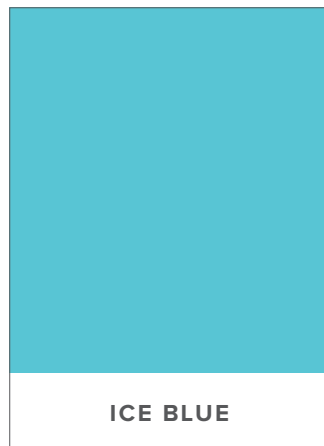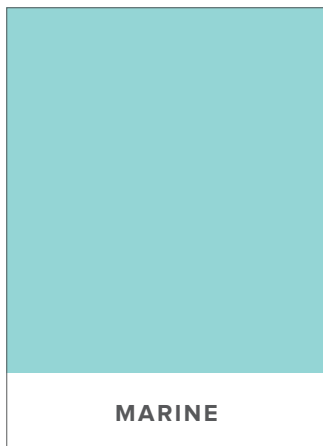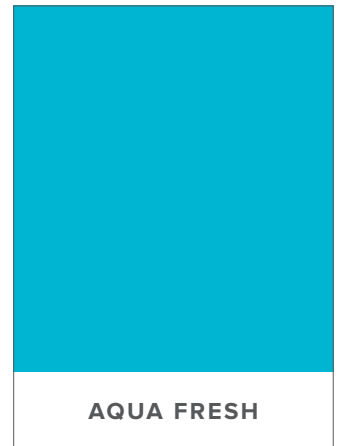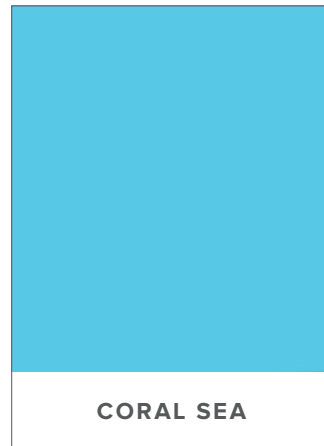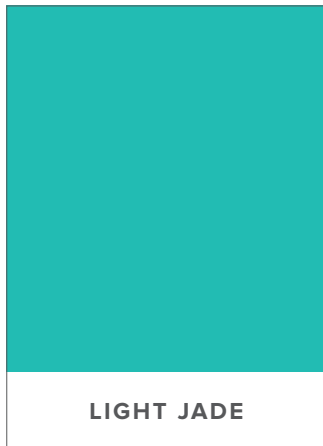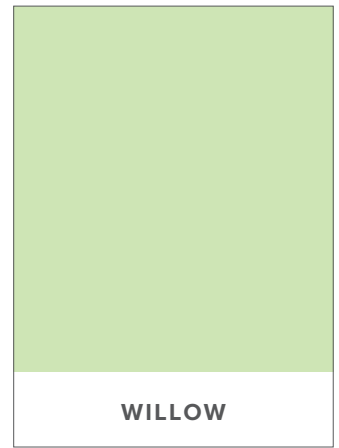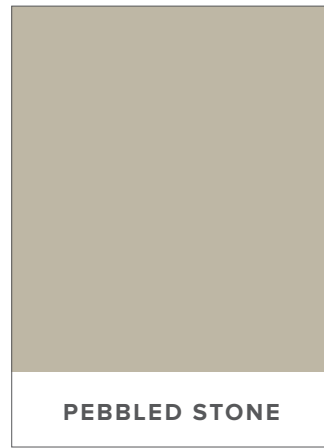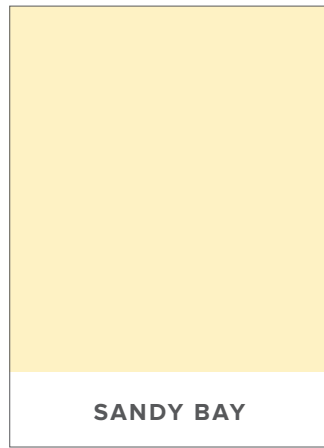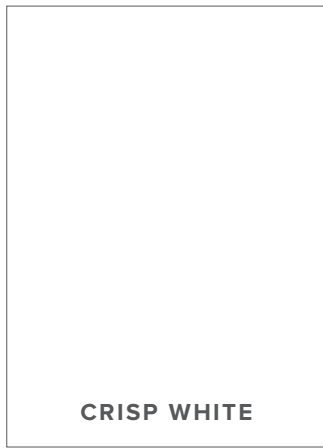

\*Disclaimer: The colour samples as printed in this colour brochure are replicated as close as possible to the actual colour as the printing service allows. To ensure that you choose the right colour BG Pool recommends ordering a Master Sample to verify your colour first before placing your order. Some charges might apply.

**Product Information:** BG Pool Epoxy Swimming Pool Paint

**Appearance:** High Gloss

**Colour:** White, Black and a white range of Inspired Colours tints.

**Generic type:** Polyamide cured Epoxy 3:1 (V:V)

**Pot life:** 90 minutes at 25°C

**Application Environment:**

<b>Surface Temperature</b>	Min. 10°C* - Max. 40°C *or min. 3°C above dew point
<b>Ambient Temperature</b>	Min. 10°C - Max. 40°C
<b>Relative Humidity</b>	No lower limit - Max: 85 %

Drying time at 25°C: Touch Dry = 3 hours  
Hard Dry = 16 hours  
To re-coat = Min. 16 hours - Max.2 days  
Full cure = 7 days

**Important:** Drying times are temperature related.

**Thinner BG Epoxy Thinner:** 0-10% depending on application

**Brush/ Roller:** Mohair preferred 11mm nap

**Airless Spray:** Tip range 15-21 Thou. Min. tip pressure 150 bar (2200psi)

**Coverage:** Under normal circumstances the following average spreading rates apply:

**BG Pool Epoxy Primer Sealer:** Approximately 22- 26m2 per 3.5Lt kit depending on surface porosity, texture and profile

**BG Pool Epoxy Top Coat:** Approximately 22- 24m2 per 3.5Lt kit per coat.

**Start-up and aftercare:** Maintaining the correct balance in your swimming pool water hold the key not only in protecting your new epoxy coating but is also crucial for a healthy comfortable swimming environment.

An optimal life of the coating system and a healthy happy pool will be possible by maintaining the following parameters.

Test	Range
<b>Ph</b>	7.5 – 7.8
<b>Calcium hardness</b>	280 – 340 ppm
<b>Total alkalinity</b>	160 – 180ppm
<b>Free chlorine</b>	<3ppm

